



# HANKOOK CHEMICAL & SYSTEM

- Tire Mold Patterning Rubber
- Tire Release Agent/Paint
- Car Detailing Products
- Design Concrete Panel
- Industrial Scale Remover
- Water Treatment Agent
- Special Lubricant

 Hankook Chemical & System CO.,LTD

10, Cheomdanyeonsin-ro 29beon-gil, Buk-gu,  
Gwangju, Republic of Korea

Tel : 062-973-0300 Fax : 062-973-0344



# Hankook Chemical & System

Hankook C&S Co., Ltd. is a 45-year-old material parts company that researches/manufactures eco-friendly precision chemical products.

Starting with the development of automobile tire transfer and special paint for the first time in Korea, we are focusing on research and development for the world's best quality and localization technology by producing products in the special chemical field.

As a result, it succeeded in developing localization of tire mold patterning rubber, and through this technology and product power, Recently, we are producing design concrete panels that reveal various colors and emotional designs, and detailed chemical products that can be fully cared for cars.

We are also producing eco-friendly industrial products on our own through 20 years of know-how in supplying water treatment drugs and facilities.

We will always continue to value corporate social and environmental values and become an eco-friendly company that achieves sustainable development.

*Na Yong Beom* CEO of Hankook Chemical & System Co., Ltd.

## VISION

Long Lasting Corporation Through New Item Creation

Honest Corporation that Regards Customers the Most

Global Hidden Champions Through Smart & Environmental Management

# HISTORY

<b>1978</b>	<b>10</b> Established as a Company BARDAHL KOREA	<b>2011</b>	<b>03</b> Renewal of ISO1400:2004 Certificate Selected as a Management Innovation Business [Main BIZ]
<b>1979</b>	<b>11</b> Renaming as Hankook Yuhwa System		<b>09</b> Designated as an IBK Industrial Bank Family Company Selected as a Promising Small Size Company by Gwangju Metropolitan City
<b>1999</b>	<b>03</b> Establishment of Jangseong Factory (Dong hwa-myeon, Jangseong-gun, Jeollanam-do, Korea)	<b>2012</b>	<b>01</b> Recognition as a clean business establishment
<b>2001</b>	<b>06</b> Obtaining ISO 9001:2000 Certificate	<b>2013</b>	<b>01</b> Establishment of a Chinese Distributor
	<b>07</b> Corporate conversion to Hankook Yuhwa Co.,Ltd.		<b>05</b> Transferring after Plant Expansion (Yeonje-dong, Buk-qu, Gwangju Metropolitan City)
<b>2003</b>	<b>05</b> Integration of Head Office and Factory (974-6, Wolchul-dong, Buk-gu, Gwang-ju si)	<b>2014</b>	<b>10</b> Awarded for Best Long-Term Enterprise Commendation
<b>2006</b>	<b>04</b> GE Betz Distributor in the southwestern part of the Republic of Korea	<b>2015</b>	<b>03</b> Risk assessment workplace excellence recognized
	<b>09</b> Export tire release agent to China		<b>06</b> Rubber Exports to Taiwan
<b>2007</b>	<b>03</b> Export rubber to China	<b>2016</b>	<b>04</b> Acquired certification for youth friendly small business
	<b>07</b> Selected as a Technology Innovation Business [INNO-BIZ]		<b>10</b> Renewal of ISO 9001:2015 Certificate Renewal of ISO 14001:2015 Certificate
	<b>09</b> Selected as a Venture Company [Technology Guarantee Fund]	<b>2017</b>	<b>03</b> Be awarded the model taxpayer
	<b>10</b> Export tire release agent to Vietnam		<b>05</b> Korea Atomic Energy Research Institute (KAERI) appointed as FAMILY company
<b>2008</b>	<b>05</b> Selected as a Manufacturer Specialized in Materials and Parts Obtaining ISO 14001:2004 Certificate		<b>07</b> Selected as a pre-hidden champion
<b>2009</b>	<b>05</b> Establishing R&D Department/Certification	<b>2018</b>	<b>10</b> Change CEO
	<b>12</b> Establishing an Attached R&D Center /Authorization	<b>2021</b>	<b>10</b> Exhibition of Design Concrete Panel at Gwangju Design Biennale
<b>2010</b>	<b>04</b> Establishing an Attached R&D Center of Photonics	<b>2022</b>	<b>11</b> Korea Invention Promotion Association Receives Patent Silver Award
	<b>05</b> Renewal of ISO9001:2008 Certificate		
	<b>06</b> Renaming as Hankook C&S Co.,Ltd		
	<b>10</b> Obtaining as A+ MEMBERS by Technology Guarantee Fund		
	<b>12</b> Selected as a Promising Export Small Size Company Selected as a Partner Company by KITECH		

# CERTIFICATE

ISO 9001



ISO 14001



INNO-BIZ



MAIN-BIZ



Venture Company



Parts & Materials specialized Company



R&D Center



Promising Export Small Business



A model taxpayer



Risk assessment Certificate



Pre-Hidden Champion



Youth-friendly Small hidden champion



# PATENT










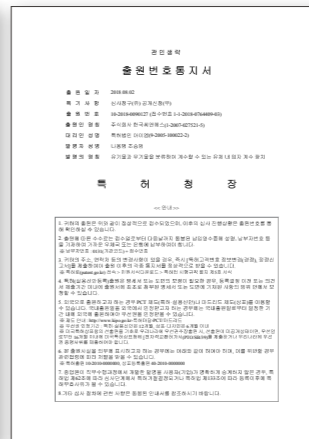














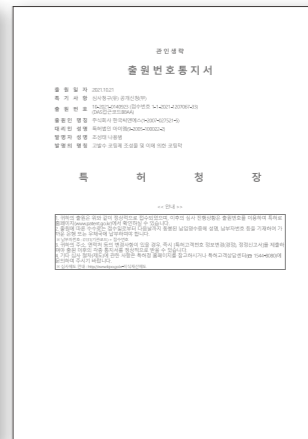

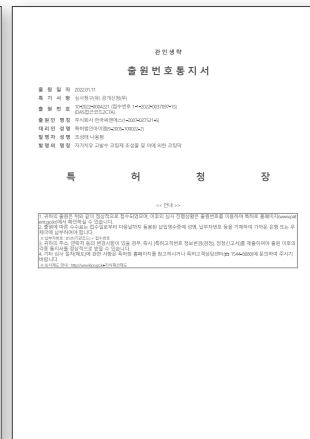

# TIRE MOLD PATTERNING RUBBER

## HKRUB Series

(Tire Mold Patterning Rubber)



### Product Description

- This product is a two-component liquid rubber used by mixing Part A and Part B in an appropriate ratio as a tire mold rubber.
- By optimizing the viscosity, even a tire mold with a fine and complicated pattern of 0.2 mm can be modeled perfectly.
- This product minimized the entrainment of air bubbles.

### Product Features

- ✓ Possesses specialized technology exclusively in Korea
- ✓ Developed the world's first eco-friendly hardener (The only eco-friendly technology in the world so far)
- ✓ Application of the production of casting tire molds

### How to Use

- In order to improve the physical properties of the product, Part A and Part B are uniformly stirred for about 3 minutes before using them.
- Input Part A and Part B in a clean container at an appropriate ratio (Part A 100: Part B 14) and mix evenly with a mixing machine for at least 2 minutes. Be careful about the bottom and side of the container.
  - Mixing amount: Mix one sector with one sector.
  - Mixing ratio: Adjustable according to product quality and work environment (Use range: 12 - 16%, Recommended mixing ratio: 14%)
- Preparation Before Use
  - ① Sometimes coating with mold releasing agent on the whole surface of master model in order to facilitate its. Drying by using an air gun after coating or drying in the natural state for over 30 minutes. (In coating, use a soft brush.)
  - ② Coating with the adhesive to improve the adhesion of the surface of rubber and model case. (In coating, use a soft brush.)

# TIRE MOLD PATTERNING RUBBER

## Casting Mold



## Hardening Conditions

- Part A and Part B should be applied at the optimum temperature of 23 - 25 °C.
- Workroom temperature: Maintain room temperature above room temperature (20 °C or above) (Recommended temperature: 25 - 30 °C).
- Hardening time: 16 hours or more
- The hardening rate is faster at temperatures higher than the product temperature of 25 °C and slower at lower temperatures.
- Avoid using the product at temperatures below 20 °C and above 30 °C.  
\* Please comply with the usage standards

## Hardness

	Test Items	Measurement value	Test Conditions
Hardness	HKRUB200	6~7	TECLOCK GS-706N(TYPE A) (= KORI TYPE SA) (JIS K 6301 A)
	HKRUB300	9~10	
	HKRUB400	18~19	

## Precautions for Storage and Mixing

- Storage Temperature of Part A & Part B: 25 - 30 °C (the optimal temperature of the product: 23 - 25 °C)
- Worker's Wearing of Safety Equipment: to wear the safety shoes, protective glasses, rubber gloves, and mask before working.
- Agitation should be carried out in the well-ventilated area.
- Use as soon as possible.

## Rubber Sales Status

The Korean market is dominating 100%, and it is exporting to China, Thailand, Taiwan, and Romania. We are exporting to a company called HIMILE in China as our main customer, and the products are used by all top five companies worldwide.



# TIRE RELEASE AGENT

## Rim Release Agent



RE20008M / RE20008MTB

### Rim Release Agent

In the final inspection of tires, this special product helps attach or detach of tires on the rim part of TUG machine, prevents corrosion, and protects TUG machine.



### Product Features

- ✔ It is aqueous without silicon, so it is highly stable and harmless to the human body.
- ✔ This product has proper dysmorphism and lubrication, so there is no residue after drying, so it does not adversely affect tires.
- ✔ It is easy to handle and economical compared for usage.

## Tire Inside Release Agent



RE1000GTI / RE1000GTI-B

### Rim Release Agent

When spray an appropriate amount inside the green case, it improves the lubrication between the inner part of the tire and the bladder, during pressurization, which is effective in improving the defect rate.

### Product Features

- ✔ It is aqueous without silicon, so it is highly stable and harmless to the human body.
- ✔ This product has proper dysmorphism and lubrication, so there is no residue after drying, so it does not adversely affect tires.
- ✔ It is easy to handle and economical compared for usage.

# TIRE RELEASE AGENT

## Trimming Oil (Water-Base)



WT100

### Product Description

This product is used in the trimming cutting process of tires, and is an emulsion product developed water-soluble using environmentally friendly materials, and has excellent dilution stability and convenient use. In addition, when processing rubber, plastic, etc., it is easy to work by exhibiting proper lubrication, and it does not adversely affect tires by leaving no marks on tires.

### Product Features

- ✔ The dilution stability is excellent.
- ✔ It is highly lubricating and improves the efficiency of the work.
- ✔ It is stable as non-polluting and non-toxic.
- ✔ It is easy to handle and an economical product that can be used by diluting water 1:1 ratio.

## Trimming Oil (Water-Base)



HK3415W

### Product Description

This product used in the trimming cutting process of tires, and emulsion developed as water soluble using environmentally friendly materials which has excellent dilution stability and is easy to use. Main applications are non-ferrous metals, stainless and iron grinding, and suitable for lubricants when machining rubber or plastic.

### Product Features

- ✔ No harm to the human body.
- ✔ No adverse effect to the rubber.
- ✔ As the residue is not left after drying, it makes the tire's appearance beautified and there is no metal corrosion.
- ✔ As it is good in lubricity, it prevents the wear of tools or machinery.
- ✔ As there is no solvent and it does not include silicon, so there is no toxic component. It is water base, so there is no risk of fire.
- ✔ When used in rubber products, as the extra trimming oil content is less than the reference value, so it is classified.
- ✔ As the general waste and issues in waste disposal cost savings and working environment improving effect.

# TIRE RELEASE AGENT/PAINT

## Building Release Agent



### HK2006

#### Product Description

Prevents sticking between the green case and the molding bladder when forming the tire, and between the mold and the green case, It's a special product that emulsifies non-silicon pure synthetic hydrocarbons that make it easier to release.

#### Product Features

- ✔ No harm to the human body.
- ✔ Excellent releasability during green case molding.
- ✔ No harm when curing rubber.
- ✔ No adverse effect on adhesion between rubbers.
- ✔ No solvent, and no silicon is included, so there is no toxic ingredients, and there is no risk of fire because it is water-based.

## Silicon Release Agent



### HK700

#### Product Description

Emulsion product developed as water soluble using environmentally friendly materials which has excellent dilution stability and is easy to use. It exhibits excellent heterogeneity when processing rubber, plastic, etc., and has excellent heat resistance, so it is a chemically stable product without the generation of residue and impurities caused by carbonization.

#### Product Features

- ✔ It is an O/W type emulsion product with excellent dilution stability.
- ✔ It has excellent heterogeneity and improves the efficiency of its work.
- ✔ It is stable as non-polluting and non-toxic.
- ✔ It is an economical product that is easy to handle and can be diluted with water.

## Tire Tread Lettering Paint



### HK1000L

#### Product Description

It is an un- aromatic paint used to imprint product information on tire tread rubber, has a clear color even with a thin coating and is excellent in terms of various physical properties such as applicability, dryness, light resistance, and heat resistance, so the appearance quality is improved and can facilitate Lot tracking by easily checking information such as specifications and patterns of tire products.

#### Product Features

- ✔ This is well-applied on the tread rubber and has excellent adhesion, so it is not spreaded well to the mold in vulcanization. Excellent releasability during green case molding.
- ✔ Its fast drying speed does not contaminate other equipment in operation.
- ✔ Its beautiful color and the unchanged color after the tire vulcanization improve the external quality.
- ✔ Its excellent heat-resistant and UV-stability are profitable for tire export.
- ✔ Its excellent storage stability and domestic first non-aromatic solvent are less harmful to the human body.

## Tire Line Paint

Oil-Based



### HK3000

#### Product Description

It is an eco-friendly water-soluble tire color line paint apply to tire tread rubber, which serves to beautify the appearance of the tire and facilitate Lot tracking.

#### Product Color

White , Yellow, Orange, Pink, Red, Green, Sky blue, Blue, Purple

#### Product Features

- ✔ This is well-applied on the tread rubber and has excellent adhesion, so it is not spreaded well to the mold in vulcanization. Excellent releasability during green case molding.
- ✔ Its fast drying speed does not contaminate other equipment in operation.
- ✔ Its beautiful color and the unchanged color after the tire vulcanization improve the external quality.
- ✔ Its excellent heat-resistant and UV-stability are profitable for tire export.
- ✔ Its excellent storage stability and domestic first non-aromatic solvent are less harmful to the human body.

## Tire Line Paint

Water-Based



### HK3000W

#### Product Description

It is an un- aromatic paint used to imprint product information on tire tread rubber, has a clear color even with a thin coating and is excellent in terms of various physical properties such as applicability, dryness, light resistance, and heat resistance, so the appearance quality is improved and can facilitate Lot tracking by easily checking information such as specifications and patterns of tire products.

#### Product Color

White , Yellow, Orange, Pink, Red, Green, Sky blue, Blue, Purple

#### Product Features

- ✔ This is well-applied on the tread rubber and excellent adhesion, so it is not spread well to the mold in vulcanization.
- ✔ Its fast drying speed does not contaminate other equipment in operation.
- ✔ Its beautiful color and the unchanged color after the tire vulcanization improve the external quality.
- ✔ Its excellent heat-resistant and UV-stability are profitable for tire export.
- ✔ Its storage stability is excellent.
- ✔ As there is no solvent and silicon is not included, there is no toxic component, and it is water base, so there is no risk of fire.

**ZOMBIE**

De'ART

WELLCO

# Car Detailing Products

Cleaner / Wash / Coating



## What is Car Detailing !

All about the Car Care

Car wash - Interior care - Exterior care - Clean Tire & wheel - Coating .. etc

## CAR DETAILING PRODUCTS



### Tire & Trim Coat

500ml, 4L  
Tire & Trim gloss coating agent  
• Contains 60% silicone Oil



### Wheel & Tire

alkaline  
Cafe Latte  
500ml, 4L  
Tire browning and wheel dust removal




### Plastic & Leather Coat

neutral  
500ml, 4L  
Leather coating agent for Home and Car



### Interior Clean

neutral  
All in One  
500ml, 4L  
Interior clean agent for Home and Car

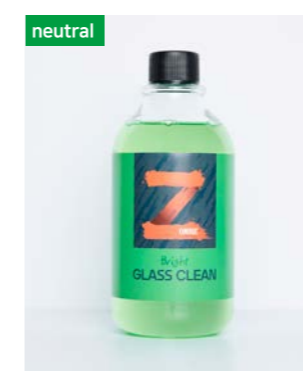

### Bright Glass Clean

neutral  
500ml, 4L  
Glass clean agent for Inside/Outside



### Bug Off

alkaline  
500ml, 4L  
Insect removal (for an insect carcass, bird droppings)



### Previous Wash


neutral  
500ml, 1L, 4L  
More clean with pre-wash  
• 1:10 Compressed Sprayer dilution available



### Bubble Wash

neutral  
500ml, 1L, 4L  
Bubble car wash  
• 1:500 to 1:1000 dilution available

# CAR DETAILING PRODUCTS

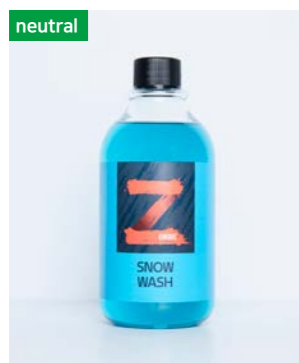


neutral

## Snow Wash

500ml, 1L, 4L, 20L

Snow foam  
• 1:10~1:20 Foam lance dilution available

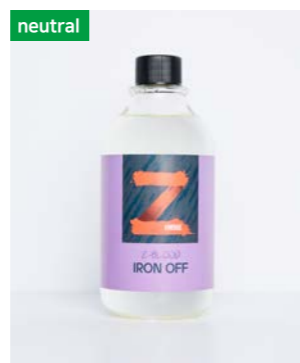


neutral

## Iron Off

500ml, 4L

Iron removal for car paint surfaces and wheel

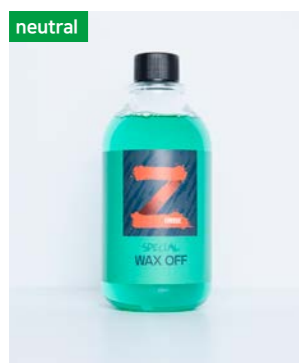


neutral

## Wax Off

500ml, 4L

Oil removal with no scratch

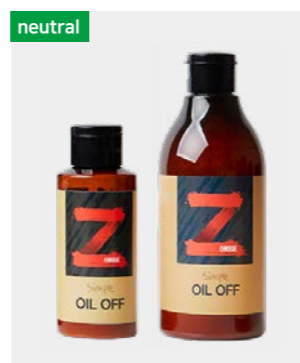

neutral

## Oil Off

Simple  
100ml, 300ml

Car oil film removal

# WELLCO

## Highly concentrated Tire WAX

Excellent in gloss maintenance  
And film formation of tires  
Use dilute with water.  
(Max, an undiluted solution : water = 1 : 3)

20kg



*De-ART*  
**DETAILINGART**  
Premium car detailing products



## Tire & Trim Coat INCREDIBLE

300ml

Premium Tire & Trim coating agent  
• Contains 70% silicone Oil



## Glass Coat ARISTOCRAT

30ml

• Long-lasting glass water repellent coating agent  
• Beginners can work!

Applicator, Suede, Instructions



## Wheel Coat KINGDOM

300ml


High quality wheel coating agent with easy workability and excellent performance



## Hybrid Carnauba ELYSIUM

150ml

Hybrid solid wax combining T1 class Carnauba and SiO2

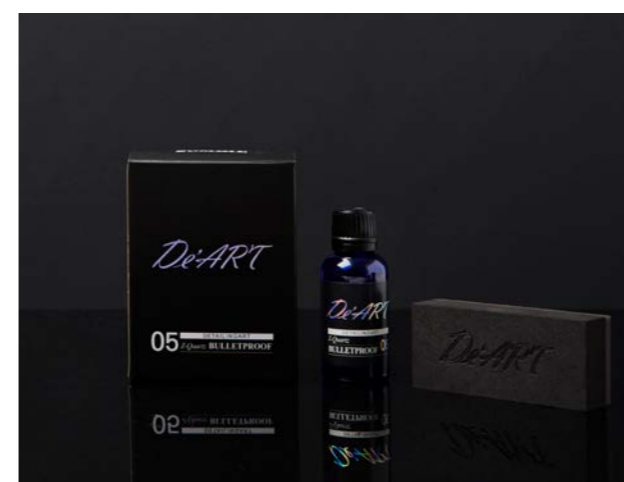

## Z-Quartz BULLETPROOF

30ml

• Glass film coating agent, has excellent antifouling property  
• Beginners can work!

Applicator, Suede, Instructions



# DESIGN CONCRETE PANEL

## CONCRETE PANEL

### Product Description

"Differentiated concrete panels with various 3D designs and various colors" Design concrete panel use construction technology that only installs them on site after making pre-panel in the factory. Therefore, compared to the exposed concrete construction technique of the general reinforced concrete installation method, the cost can be saved by shortening the construction period. And quality and technical problems such as poor quality of exposed concrete that may occur in the exposed concrete method can be prevented in advance during on-site construction, thereby reducing repair costs.

### Product Features

- ✔ 35 - 44% reduction in construction period compared to the existing method, reducing construction cost by about 30%.
- ✔ Using the rubber casting technology for tire manufacturing accumulated over 40 years, the company has secured the technology to perfectly reproduce various 3D designs. Since concrete panels are made by applying high-strength concrete that can realize various strengths and colors, it can more broadly meet the needs of customers who pursue artistic beauty.

### Representative Design (Possession Products)

- ✔ Size(2 types) : 500mmx500mm , 600mmx600mm
- ✔ Thickness(2 types) : HPC(40~50Mpa) → 35mm, UHPC(60~100Mpa) → 30mm
- ✔ Color(4 types) : Gray, Yellow, Red, Green
- ✔ Design(3 types) : Diamond, Bamboo basket #1, Bamboo basket #2



Diamond



Bamboo basket #1



Bamboo basket #2

### Award Winning Career

Patent of rubber composition for forming exposed concrete panels



A patent Silver award (KIPA)



Product presentation in 2021 Gwangju Design Biennale



# DESIGN CONCRETE PANEL

## Construction Case



## Eco-friendly WATER REPELLENT

### HCS-WR7000

#### Product Description






- Water repellent for eco-friendly permeable design concrete panels developed by manufacturer.
- The properties of the product do not change the color of the milky white or building, and are especially excellent in maintaining the color of color concrete.
- Excellent surface water repellency and excellent finish function of the building.



# PANEL DESIGN Product design

※ All designs can be applied as interior and exterior materials.  
 ※ Design and Size can be custom-made according to customer requests.  
 (additional costs may be incurred.)

· Size(2 types) : 500mmx500mm , 600mmx600mm  
 · Thickness(2 types) : HPC(40~50Mpa) → 35mm, UHPC(60~100Mpa) → 30mm  
 · Color(4 types) : Gray, Yellow, Red, Green

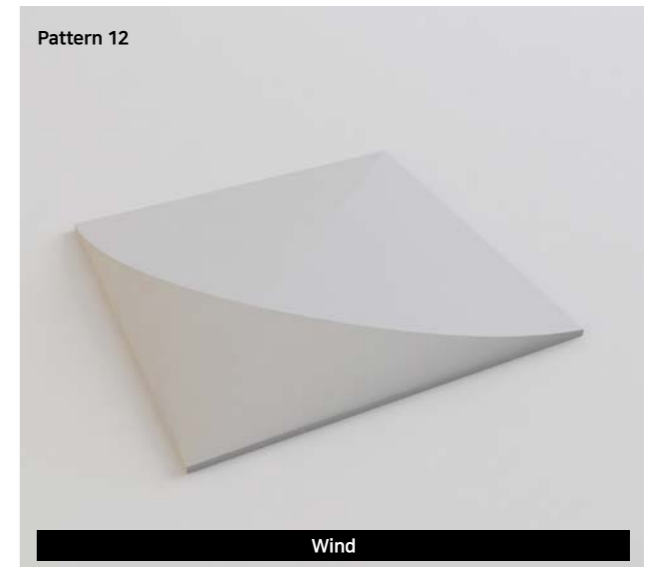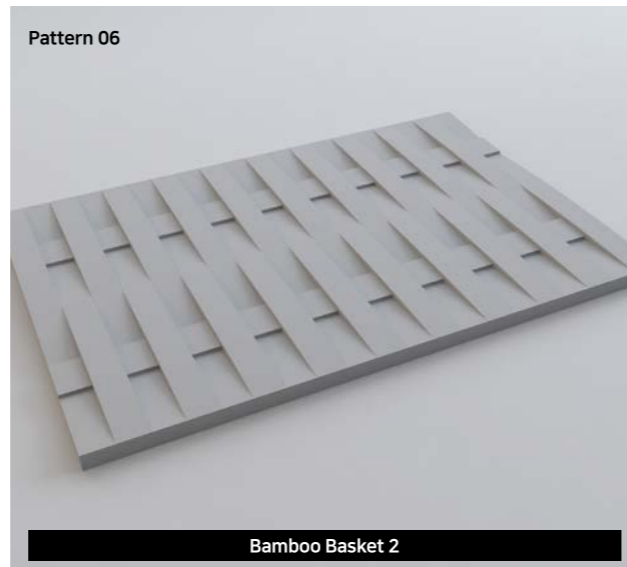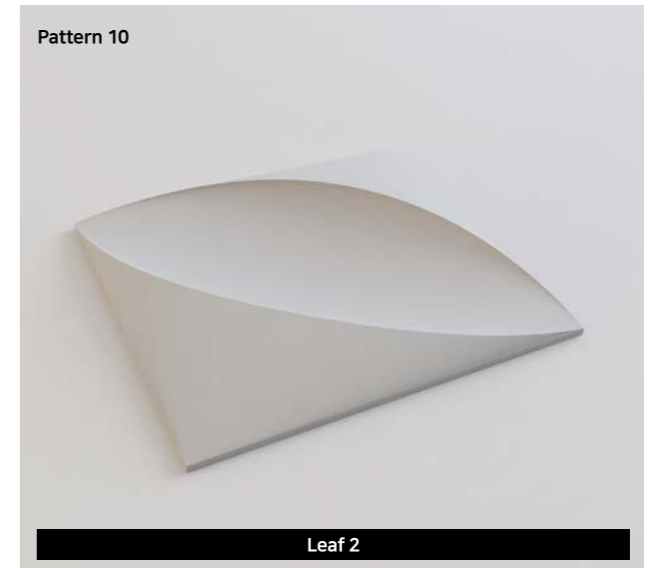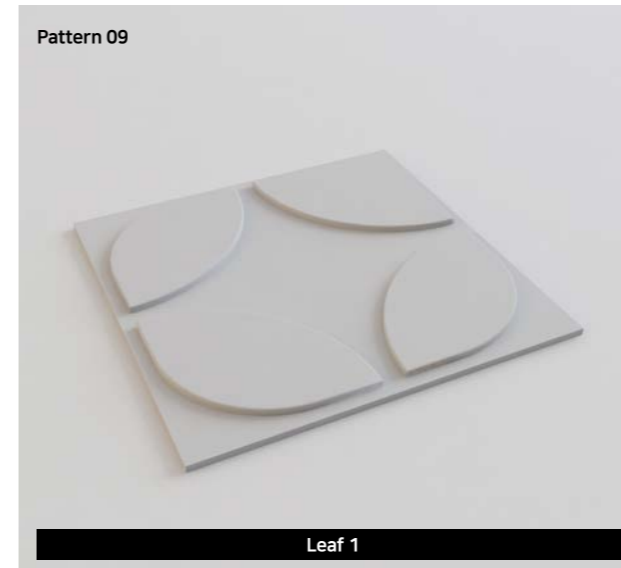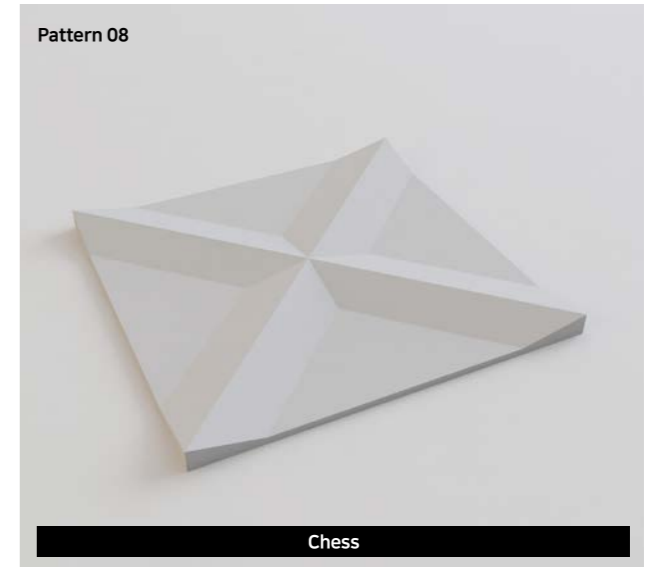

# INDUSTRIAL SCALE REMOVER

## Water Scale Remover



### HCS-F21HB

#### Product Description

Scale remover for facilities using seawater, fresh water, circulating water as industrial water. (In particular, it is excellent in removing the scale of the electrolytic tank of seawater electrolytic facilities using seawater.)

#### User Company

Korea Hydro & Nuclear Power Co., Ltd.

#### Volume

20L / 200L

#### Product Features

- ✔ Product that not use hazardous chemical used regulated by the Chemical Substance Control Act.
- ✔ Excellent solubility even at room temperature. (25°C)
- ✔ "Excellent" as a result of corrosion resistance evaluation of positive/negative electrode plate immersion in seawater electrolysis equipment. (by Korea Testing & Research Institute.
- ✔ Household chemical product subject to safety confirmation. (No. GB21-02-0471G)

#### Applicable Materials



#### Metal

Titanium, carbon steel, stainless steel, etc.  
※ Zinc (Zn) material may be dissolved.



#### Non - Metal

Plastic series, rubber, glass, etc.

# INDUSTRIAL SCALE REMOVER

## Rust Scale Remover



### RUST REMOVER

#### Product Description

Removal for sticking rust removal

#### Volume

4L, 20L

#### Product Features

- ✔ Neutral product which is safe and excellent for solid rust removal.
- ✔ It can be used without damage to the base material and does not cause discoloration or decolorization of the metal.
- ✔ Fast reaction with rust(iron) for excellent workability.
- ✔ Banana scent added.
- ✔ Product certified as living chemical products subject to safety check. (No. GB21-02-0436)

## Hesperidin Scale Remover



### HCS-ECO200

#### Product Description

The use of removing the hesperidin scale from pipes/valves in the manufacturing process of citrus concentrate and removing the gelation scale inside the heat exchanger.

#### Volume

20L

#### Product Features

- ✔ Eco-friendly product, so has less impact on the environment.
- ✔ This product uses raw materials disclosed in the Ministry of Food and Drug Safety's "Food Additive Process(Ministry of Food and Drug Safety Notice No. 2021-19)".
- ✔ Excellent solubility allows for reuse of cleaning agents depending on scale conditions.
- ✔ Convenient use at room temperature without heating.
- ✔ Reduce air transportation and cost compared to decomposition cleaning by removing scale using CIP circular cleaning . [Recommended using an air-mixed circulation pump]
- ✔ When wastewater treatment, it is available at the level of 3% caustic soda chemical treatment.

# WATER TREATMENT AGENT / SPECIAL LUBRICANT



## Water Treatment Agent

Water Treatment of public housing made in the world best company SUEZ

Water & Process Technologies

- ✔ SUEZ Group, the 1<sup>st</sup> Ranked Company respected in the world
- ✔ Product of SUEZ W&PT as a global leader
- ✔ NSF certified product which is harmless to the human body
- ✔ ISO certified product
- ✔ Implementing the water quality analysis openly and directly
- ✔ Joining 5 billion won(KRW) as product liability insurance

### FloGard™ POT6103 Potable Water Treatment

Division	Solid corrosion inhibitor (Type1 No.1, Type2 No.1)	Liquid corrosion inhibitor (Type1 No.2, Type2 No.2)
Property & State	Solid (circle type)	Liquid
Main component	Phosphate	Phosphate silicate, Silicate
pH	Alkaline pH (More than 12)	Neutral, Alkaline
PL insurance	Insufficient amount	\$ 5,000,000 (KRW more than about 5 billion won)
NSF Certified	None	Certification
Input method	Natural dissolution by using a dispenser	Infusing the fixed amount of prescribed concentration by using a metering pump
Characteristics	As the solubility is irregular, the latter period of use is weakened in chemical agent concentration.	To be able to keep the chemical agent concentration by inputting by using a metering pump input.

### CorrShield™ NT4202 (Pipe clearing agent for heaters)

- Corrosion protection of the secondary axis of district heating and hot water boiler
- Continuous corrosion-resistant effect by one infusion
- Corrosion protection effect of multiple-metal which is system equipment configuration
- Can also be added to the SYSTEM containing antifreeze



Not inputting the pipe cleaning agent

Pollution of the hot plate by hot plate scale and corrosion



Hot plate the pipe cleaning agent is input

Clean state by anti-corrosion effect



Washed hot plate

Unwashed clean hot plate

# WATER TREATMENT AGENT / SPECIAL LUBRICANT



## Water Treatment Facility

SUEZ Water & Process Technologies

Water & Process Technologies

### Potable Water Program

- ✔ Flogard POT Series are products which are certified by NSF as a rust inhibitor to the piping and equipment of drinking water.
- ✔ Klaraid CDP Series and PolyFloc AP Series are products which are certified by NSF and FDA as a polymer flocculating agent.

### Boiler Water Program

- ✔ This provides the increase of boiler efficiency, the energy saving, the extension of device life expectancy by solving problems such as the scale by hardness contained in the water, corrosion due to oxygen, carry-over problem by operating conditions and foaming.



### Cooling Water Program

- ✔ We provide a variety of industries with the inorganic coagulant for treating industrial water and waste water, polymer flocculating agent, and heavy metal remover, etc.

### Water & Waste Water Program

- ✔ We provide a variety of industries with the inorganic coagulant for treating industrial water and waste water, polymer flocculating agent, and heavy metal remover, etc.

### On-line & Off-line Cleaning Program

- ✔ This has excellent cleaning effect on the scale(inorganic substances) which occurred in various industrial equipment and heat exchanger, reactor, drum, etc. and especially is low in the effect on base material, so the risk is very low, and the workability is easy.

### Dust Control & Paint Killing Program

- ✔ These are the products which protect the environment by removing the odor and environmental air pollutants occurring from industries, equipped with a program to solve various disturbances in the boiler furnace.

### R/O Equipment & Membrane Filter

- ✔ We produce and sell various reverse osmosis equipments and membranes to meet the needs of customers, which are applied to a wide variety of industries and processes.

### Equipment

- ✔ We sell various equipments for customers such as E-Series producing ultra-pure water, Ozone Generator, Filter Housing, Pump, etc.

## Special Lubricant



KLUBER LUBRICATION (Germany)



CHEMTOOL(USA)



FUCHS (Germany)



SUMICO (Japan)



OMEGA (Canada)

